TECH NAUTICS
SOLUTIONS BELOW AND BEYOND

MODULAR TOW CAMERA

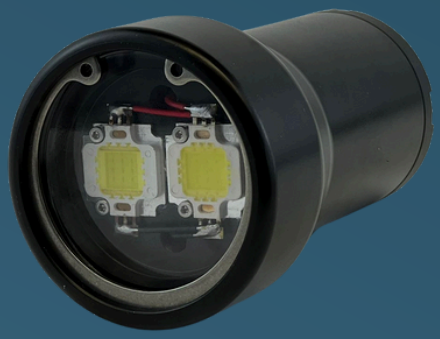

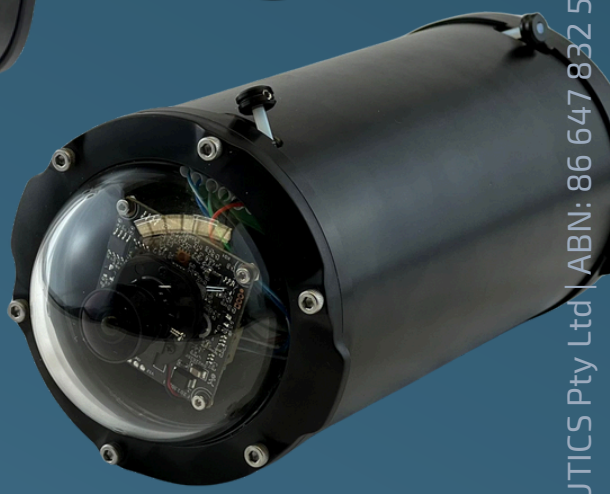

Anti catch frame designed to minimise risks of entanglement or hooking on corals and debris

DEPTH RATING: 500 meters (limited by the IP link)

UMBILICAL: 130 meters standard 16awg core with twisted pair for comms

COMMUNICATIONS: Ethernet over Power Line Communications - 500mbps

POWER: Nominal 24V. Optional auto output supply for longer cables >150m

CAMERA: HD IP 1920 x 1080 25fps

LED LIGHTING: 2 x 2100 Lumens 24V RS485 with independent brightness control

SOFTWARE: Windows Video Capture software with overlay. GPS input (Serial or IP)

OPTIONAL: Thruster for heading control giving 360° rotation

Info@technautics.com.au
www.technautics.com.au
20 Mews Rd, Fremantle, WA 6160 - Australia

TECHNAUTICS Pty Ltd | ABN: 86 647 832 568